


ERGOPLUS 36

CE EN60974-7



CODE	↔			
MA4204-030	3 m	10'	 EURO	1
MA4204-040	4 m	12'		1
MA4204-050	5 m	16.4'		1
MA4204-060	6 m	19.6'		1
MA4204-080	8 m	26.2'		1

TECHNICAL DATA		
	ERGOPLUS 36	
	1,4 kg	3.09 lb
V PEAK	113	
	0,6 ÷ 1,6 mm	.023" ÷ 1/16"
X 60%	330A CO2 - 300A Mix	

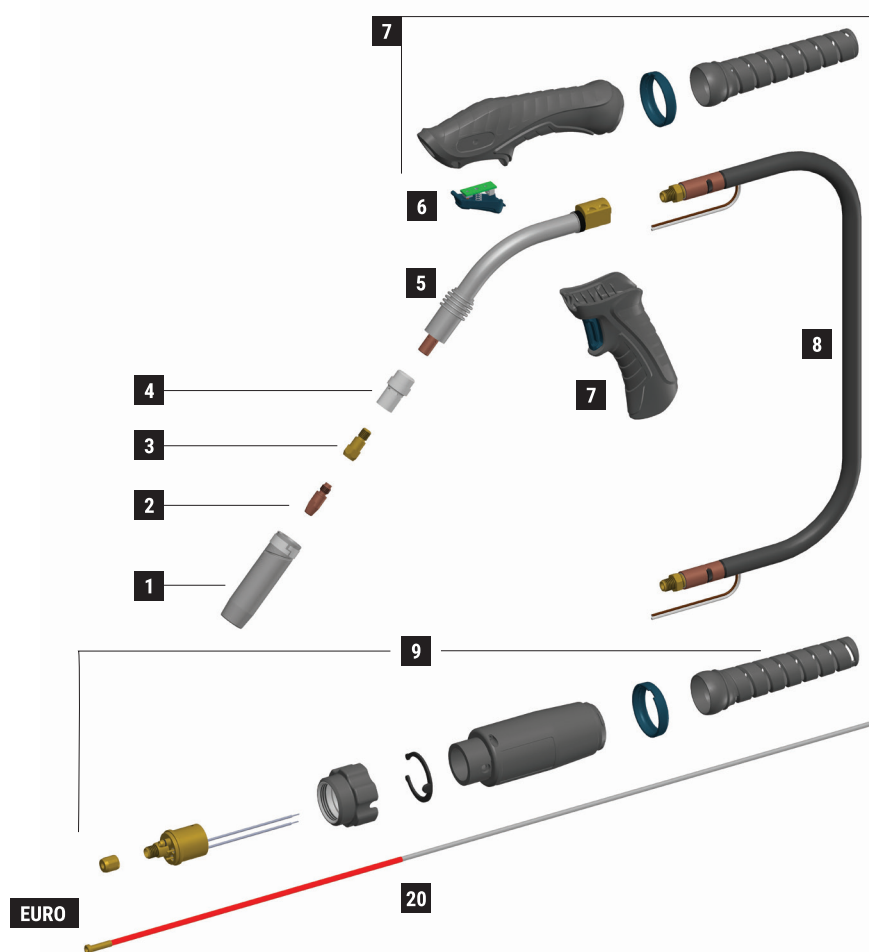

	CODE			Ø				REF	
1	MC0527		quick release nozzle - 2,5 mm thickness	16 mm	5/8"	84 mm	3"-5/16	-	10
2	MD0005-82		M8 - CuCrZr	1,2 mm	.045"	30 mm	1"-3/16	140.0445	20
3	MD0064-00		M8 - brass			28 mm	1"-3/32	142.0020	20
4	ME0517		ceramic			32,8 mm	1"-9/32	014.0023	10
20	GM0510		red steel liner	1,0 ÷ 1,2 mm	040" ÷ .045"	3 m	10'	124.0026	1
20	GM0511		red steel liner	1,0 ÷ 1,2 mm	040" ÷ .045"	4 m	12'	124.0031	1
20	GM0512		red steel liner	1,0 ÷ 1,2 mm	040" ÷ .045"	5 m	16.4'	124.0035	1
20	GM0514		red steel liner	1,0 ÷ 1,2 mm	040" ÷ .045"	6m	19.6'		1
20	GM0543		red steel liner	1,0 ÷ 1,2 mm	040" ÷ .045"	8m	26.2'		1

***Complete list of available consumables at the end of this section**

	CODE			
5	MF1519		Ergoplus 36 torch head	1
6	MT0563		trigger kit	1
7	MT0562		handle kit	1
7	MT0566		pistol grip	1
8	MH0819-030		coaxial cable - 3 m / 10'	1
8	MH0819-040		coaxial cable - 4 m / 12'	1
8	MH0819-050		coaxial cable - 5 m / 16.4'	1

	CODE			
8	MH0819-060		coaxial cable - 6 m / 19.6'	1
8	MH0819-080		coaxial cable - 8 m / 26.2'	1
9	AR0070		EURO connector - air	1
9	BW0020		metal EURO nut	1
9	FA0026		liner nut M10x1	10
9	MT0565		back box kit EURO	1